



Service MANOSKOP® torque wrench w.mount for insert tools

730 Fix



Art.No. **96503100**
GTIN **4018754269679**
Model **730/100 FIX**



Label.

Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 200-1000N·m Tool holders 22 x 28 mm L. 1363mm

Features.

- For work in serial production
- Adjustment knob can be unscrewed after setting the trigger torque - unintentional changing of the setpoint torque is thus prevented
- The included TORX® Tamper Resistant fuse screw also protects against tampering as well as the included adhesive seals No adjustment possible without breaking the seal
- Triggering
- No reset to "0" required, since measuring element is only loaded during the tightening process
- Mount for interchangeable bits/sockets
- QuickRelease safety lock
- Fast, precise adjustment with QuickSelect quick adjustment
- Dual stop signal
- Easy to read double scale with colour differentiation of N·m/ft·lb and ft·lb/in·lb respectively
- Counter-clockwise tightening by turning the bits/sockets
- Continued loading after triggering or loading against the operating direction, e.g. with screws that are stuck, does not affect the triggering mechanism, which is therefore protected from damage.
- 2-component handle with hand-friendly green soft zone (resistant to oils, greases, fuels, brake fluids and Skydrol)
- Calibration with perfectControl® calibration system No. 7794 or calibration device No. 7706. Where applicable Readjustment does not require disassembly
- Certificate in accordance with DIN EN ISO 6789-2:2017
- DBGm
- In a sturdy plastic box (size 80-100 in sturdy steel box)
- **Display deviation ± 3%**

Advantages.

For work in serial production.

Product highlights.



Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.



Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Clear view.

Easy-to-read dual scale with colour differentiation between the N·m and ft.lb scales to simplify fine setting.


Technologies and features.



Value Lock (tamper resistant)

Adjustment knob can be unscrewed after setting the release torque. This prevents unintentional changing of the set torque. The supplied TORX® TAMPERRESISTENT locking screw also protects against tampering. The same applies to the enclosed adhesive seals. No adjustment possible without breaking the seal.

Technical Drawing.

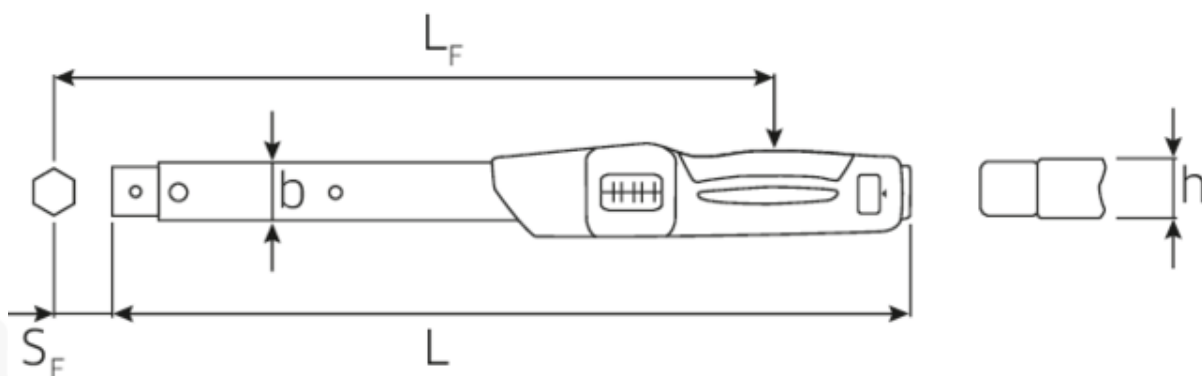

Technical Attributes.

Measuring range N·m	200-1000 N·m
Measuring range ft·lb	150-750 ft·lb

Logistics data.

Depth mm (IFS)	1520
Width mm (IFS)	145

Width mm (b)	30,6 mm	Height mm (IFS)	90
Fine scale division	5 N·m	Length (packed, mm)	1520
Weight with box	11000 g	Width (packed, mm)	145
Size	100	Height (packed, mm)	90
Size square socket [inside square drive]	22 x 28 mm	Volume (packed, dm³)	19.836 dm ³
Height mm (h)	25,6 mm	Art. no.	96503100
Length mm (L)	1363 mm	Weight (gross, kg)	11,000
LF	1352 mm	Weight PAP (kg)	0,650
MA N·m	200 N·m	Weight PVC (kg)	0,000
Nominal value N·m	1,000 N·m	GTIN	4018754269679
SF	55 mm	Country of origin	GERMANY
Scale division [E1]	100 N·m	Region of origin	Nordrhein-Westfalen
Scale division [E2]	25 ft·lb	WEEE/ElektroG	nicht ear-pflichtig
		Customs tariff no.	82041100
		Packing standard	1
		Weight	5196 g

Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
96503005	730/5 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 10-50N·m Tool holders 9 x 12 mm L. 330mm	4018754269433
96503010	730/10 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 20-100N·m Tool holders 9 x 12 mm L. 386mm	4018754269440
96503012	730/12 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 25-130N·m Tool holders 14 x 18 mm L. 421mm	4018754269457
96503020	730/20 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 40-200N·m Tool holders 14 x 18 mm L. 467mm	4018754269464
96503040	730/40 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 80-400N·m Tool holders 14 x 18 mm L. 607mm	4018754269471
96503065	730/65 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 130-650N·m Tool holders 14 x 18 mm L. 890mm	4018754269655
96503465	730NII/65 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix	4018754269778

		Measuring r. 130-650N·m Tool holders 22 x 28 mm L. 911mm	
96503080	730/80 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 160-800N·m Tool holders 22 x 28 mm L. 1178mm	4018754269662
96503100	730/100 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 200-1000N·m Tool holders 22 x 28 mm L. 1363mm	4018754269679
96583005	730A/5 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 90-450in lb Tool holders 9 x 12 mm L. 330mm	4018754269785
96583010	730A/10 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 180-900in lb Tool holders 9 x 12 mm L. 386mm	4018754269792
96583020	730A/20 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 350-1800in lb Tool holders 14 x 18 mm L. 467mm	4018754269808
96583040	730A/40 FIX	Service MANOSKOP torque wrench w.mount for insert tools No. 730 Fix Measuring r. 800-3600in lb Tool holders 14 x 18 mm L. 607mm	4018754269815

GTIN-Code.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
 info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
 Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal