

Basic wrench w.tool carrier for insert tools

730II/65 Quick



Art.No. **50184565**
 GTIN **4018754268900**
 Model **730II/65 QUICK**



Label.

Torque wrench service MANOSKOP® No. 730II/65 Quick Measuring r. 130-650N·m
 Tool holders 22 x 28 mm L. 897mm

Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5–65)
- rapid setting thanks to easy-action locking lever in the handle (sizes 5–65)
- ergonomically designed, non-slip adjuster with a thumb recess
- optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
- on request also available as an N·m-only version without twin scale (sizes 5–65)
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw – does not act on the trigger mechanism and cannot cause damage to it
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value $\pm 4\%$**

Advantages.

Releasing

Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free working.

Efficient. No resetting to "0" necessary, as measuring element is only loaded during the tightening process.

Releasing torque wrench with receptacle for exchangeable plug-in tools, double stop signal (can be felt and heard), left-hand tightening by turning over the plug-in tools.

With calibration certificate, display deviation $\pm 4\%$.



Product highlights.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Protected.

The internal mechanism is extremely resistant to mechanical wear and well protected against dirt and soiling inside the outer housing.



Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.


Technologies and features.



QuickRelease

The QuickRelease technology ensures tools cannot be inadvertently lost – while enabling rapid, safe tool changes.

Technical Drawing.

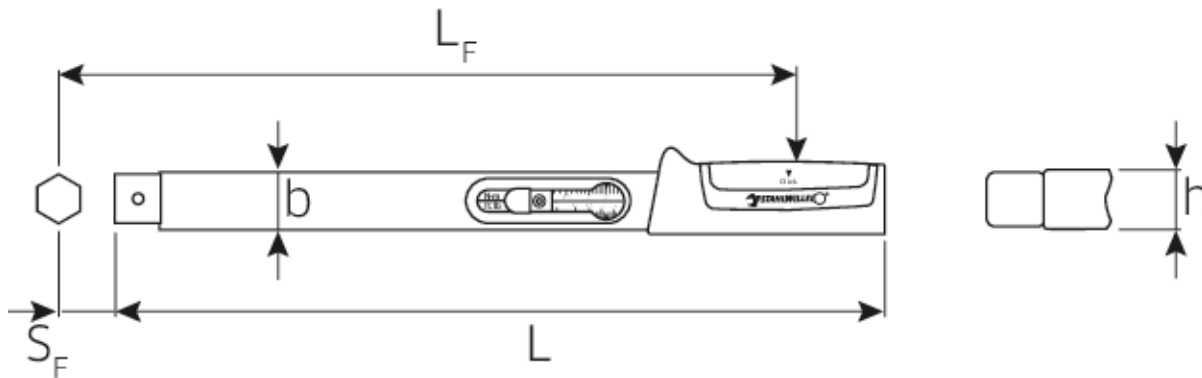

Technical Attributes.

| | |
|--|---------------|
| Measuring range N·m | 130-650 N·m |
| Measuring range ft·lb | 100-480 ft·lb |
| Width mm (b) | 30,6 mm |
| Size | 11/65 |
| Size square socket [inside square drive] | 22 x 28 mm |
| Height mm (h) | 25,6 mm |
| Length mm (L) | 897 mm |
| LF | 907 mm |
| SF | 55 mm |
| Scale division [E1] | 20 N·m |
| Scale division [E2] | 20 ft·lb |

Logistics data.

| | |
|-----------------------------------|-----------------------|
| Depth mm (IFS) | 1040 |
| Width mm (IFS) | 150 |
| Height mm (IFS) | 80 |
| Length (packed, mm) | 1040 |
| Width (packed, mm) | 150 |
| Height (packed, mm) | 80 |
| Volume (packed, dm ³) | 12.48 dm ³ |
| Art. no. | 50184565 |
| Weight (gross, kg) | 4,104 |
| Weight PAP (kg) | 0,000 |
| Weight PVC (kg) | 0,041 |
| GTIN | 4018754268900 |
| Country of origin | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| WEEE/ElektroG | nicht ear-pflichtig |
| Customs tariff no. | 82041100 |
| Packing standard | 1 |
| Weight | 4104 g |

Variants.

| Art. no. | Art. no. (ERP) | Description | GTIN |
|----------|----------------|--|---------------|
| 50184005 | 730/5 QUICK | Torque wrench service MANOSKOP® No. 730/5 Quick Measuring r. 6-50N·m Tool holders 9 x 12 mm L. 315mm | 4018754268856 |
| 50184010 | 730/10 QUICK | Torque wrench service MANOSKOP® No. 730/10 Quick Measuring r. 20-100N·m Tool holders 9 x 12 mm L. 370mm | 4018754266203 |
| 50184012 | 730/12 QUICK | Torque wrench service MANOSKOP® No. 730/12 Quick Measuring r. 25-130N·m Tool holders 14 x 18 mm L. 410mm | 4018754268863 |
| 50184020 | 730/20 QUICK | Torque wrench service MANOSKOP® No. 730/20 Quick Measuring r. 40-200N·m Tool holders 14 x 18 mm L. 455mm | 4018754268870 |
| 50184030 | 730/30 QUICK | Torque wrench service MANOSKOP® No. 730/30 Quick Measuring r. 60-300N·m Tool holders 14 x 18 mm L. 520mm | 4018754324071 |
| 50184040 | 730/40 QUICK | Torque wrench service MANOSKOP® No. 730/40 Quick Measuring r. 80-400N·m Tool holders 14 x 18 mm L. 590mm | 4018754268887 |
| 50184065 | 730/65 QUICK | Torque wrench service MANOSKOP® No. 730/65 Quick Measuring r. 130-650N·m Tool holders 14 x 18 mm L. 875mm | 4018754268894 |
| 50184565 | 730II/65 QUICK | Torque wrench service MANOSKOP® No. 730II/65 Quick Measuring r. 130-650N·m Tool holders 22 x 28 mm L. 897mm | 4018754268900 |

GTIN-Code.





STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal