



Basic wrench w.tool carrier for insert tools

730a/5 Quick

Art.No. 50584005

GTIN 4018754268979 Model 730A/5 QUICK



Label.

Torque wrench service MANOSKOP® No. 730a/5 Quick Measuring r. 50-440in lb Tool holders 9 x 12 mm L. 315mm

Features.

- click-type
- · the measuring element is only under load while force is being applied, no need for manual reset to zero
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5–65)
- rapid setting thanks to easy-action locking lever in the handle (sizes 5-65)
- ergonomically designed, non-slip adjuster with a thumb recess
- magnifying glass integrated in the display window
- · optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
- on request also available as an N·m-only version without twin scale (sizes 5-65)
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly.
- certificate in accordance with DIN EN ISO 6789-2:2017
- display deviation value ± 4%

Advantages.

Releasing

Efficient. No need to reset to "0", as measuring element is only loaded during the tightening process.

Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free working.

Releasing torque wrench with receptacle for exchangeable plug-in tools, double stop signal (can be felt and heard), left-hand tightening by turning over the plug-in tools.

With calibration certificate, display deviation ± 4 %.







Product highlights.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a ¢exible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.


Technologies and features.



QuickRelease

The QuickRelease technology ensures tools cannot be inadvertently lost – while enabling rapid, safe tool changes.

Technical Drawing.

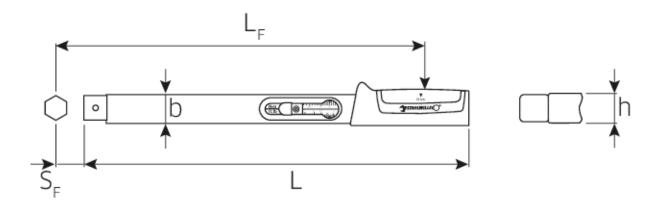

Technical Attributes.

Measuring range N·m	6-50 N·m
Measuring range in-lb	50-440 in·lb
Width mm (b)	28 mm
Size	a/5
Size square socket [inside square drive]	9 x 12 mm
Height mm (h)	23 mm
Length mm (L)	315 mm
LF	288 mm
SF	17,5 mm
Scale division [E1]	2 N·m
Scale division [E2]	10 in∙lb

Logistics data.

Depth mm (IFS)	315
Width mm (IFS)	50
Height mm (IFS)	35
Length (packed, mm)	348
Width (packed, mm)	50
Height (packed, mm)	45
Volume (packed, dm3)	0.783 dm3
Art. no.	50584005
Weight (gross, kg)	0,860
Weight PAP (kg)	0,000
Weight PVC (kg)	0,066
GTIN	4018754268979
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Packing standard	1
Weight	780 g

Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
50584020	730A/20 QUICK	Torque wrench service MANOSKOP® No. 730a/20 Quick Measuring r. 350-1750in lb Tool holders 14 x 18 mm L. 455mm	4018754269006

50584012	730A/12 QUICK	Torque wrench service MANOSKOP® No. 730a/12 Quick Measuring r. 225-1150in lb Tool holders 14 x 18 mm L. 410mm	4018754268993
50584010	730A/10 QUICK	Torque wrench service MANOSKOP® No. 730a/10 Quick Measuring r. 180-880in lb Tool holders 9 x 12 mm L. 370mm	4018754268986
50584005	730A/5 QUICK	Torque wrench service MANOSKOP® No. 730a/5 Quick Measuring r. 50-440in lb Tool holders 9 x 12 mm L. 315mm	4018754268979

GTIN-Code.

