



Standard MANOSKOP® torque wrench w. permanently installed QuickRelease ratchet

721QR/20 Quick



Art.No. 50204120
GTIN 4018754268962
Model 721QR/20 QUICK



Label.

MANOSKOP® torque wrench No. 721QR/20 Quick Measuring r. 40-200N·m Drive 1/2
L. 482mm

Features.

- Triggering
- Flash adjustment by easy-to-operate clamping lever in the handle
- ergonomically shaped, non-slip adjustment element with thumb recess
- integrated magnifying glass in the reading window
- optimised ball handle for fatigue-free working
- double stop signal
- double scale N·m/ft·lb
- no resetting to "0" required, since the measuring element is only loaded during the tightening process
- Continued loading after release or loads in the opposite direction to the functional direction, e.g. in the case of stuck bolts.
- Continued load after triggering or loads against the functional direction, e.g. with stuck screws, do not act on the trigger mechanism, which is thus protected against damage.
- Protection of all sensitive parts by the robust steel tube housing
- Calibration with the perfectControl calibration device no. 7794 or the calibration system no. 7706. If necessary, readjustment without disassembly.
- Display deviation $\pm 4\%$
- With certificate

Advantages.

Fast setting with easy-to-operate clamping lever in the handle, integrated lens for better readability of the set value

Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free work

Efficient. No reset to "0" necessary, as measuring element is only strained during the tightening process

Releasing torque wrench with permanently installed 1/2" QuickRelease ratchet, double stop signal (tactile and audible), left-hand tightening by turning over the plug-in tools

With calibration certificate, display deviation $\pm 4\%$

Product highlights.



Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Technologies and features.



QuickRelease

The QuickRelease technology ensures tools cannot be inadvertently lost – while enabling rapid, safe tool changes.

Technical Drawing.

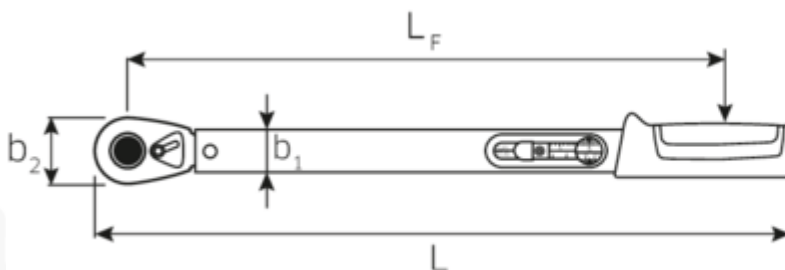

Technical Attributes.

Measuring range N·m	40-200 N·m
Measuring range ft·lb	30-145 ft·lb

Logistics data.

Depth mm (IFS)	481
Width mm (IFS)	45

External square drive (inch)	1/2	Height mm (IFS)	35
b1	28 mm	Length (packed, mm)	510
b2	41 mm	Width (packed, mm)	45
Size	20	Height (packed, mm)	45
Height mm (h1)	23 mm	Volume (packed, dm3)	1.03275 dm3
Height mm (h2)	18 mm	Art. no.	50204120
Length mm (L)	482 mm	Weight (gross, kg)	1,446
LF	416,5 mm	Weight PAP (kg)	0,000
MA N·m	40 N·m	Weight PVC (kg)	0,110
Nominal value N·m	200 N·m	GTIN	4018754268962
Scale division [E1]	5 N·m	Country of origin	GERMANY
Scale division [E2]	5 ft·lb	Region of origin	Nordrhein-Westfalen
		WEEE/ElektroG	nicht ear-pflichtig
		Customs tariff no.	82041100
		Packing standard	1
		Weight	1338 g

Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
50204115	721QR/15 QUICK	MANOSKOP® torque wrench No. 721QR/15 Quick Measuring r. 30-150N·m Drive 1/2 L. 452,5mm	4018754268955
50204120	721QR/20 QUICK	MANOSKOP® torque wrench No. 721QR/20 Quick Measuring r. 40-200N·m Drive 1/2 L. 482mm	4018754268962

GTIN-Code.



Images.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal