



Puller, two-armed

11251

Art.No. **71025101**
GTIN **4018754342037**
Model **11251/1 Abzieher, 2armig**
160x130mm

Label.

Puller Clamping w.160mm x Clamping d.130mm

Features.

- two-armed
 - for pulling off gears, pulleys, ball bearings etc.
 - nitrided spindle, no oiling necessary - maintenance-free
- Pull-off hooks can be used on both sides:
- One end of the hook is narrow (20 mm wide) for tight spaces
 - The other end of the hook is wide (24 mm wide) with a slot (8 mm), so that discs or gears can be pulled off with the aid of 8 mm screws

Advantages.

Trigger hooks can be used on both sides.

Nitrided spindle, no oiling necessary - maintenance-free.

Self-acting pressing of the puller hooks.

The nitrided surface of the pressure spindle provides excellent sliding properties and does not require additional oiling.

Product highlights.



For improved safety.

Designed with practical applications in mind, drop forged, precision machined on the latest machine tools, hardened and tempered: the STAHLWILLE puller range offers numerous products for a wide variety of applications. For example, standard pullers, cell terminal pullers, ejectors, counter stays, ball joint pullers and wheel hub pullers. Made, of course, in Germany as premium quality tools.




2vs3 - Two- or three-legged pullers?

A three-legged puller is generally preferable to a two-legged one provided there is sufficient space because it distributes the pulling forces more evenly.



Reliable.

Excellent running characteristics of the thread itself thanks to high-grade hardening and tempering and the special coatings on the thrust spindles.



More robust.


High flexural strength thanks to legs with accurately calculated profiles and smooth, milled guides.



Safe.

To prevent damage to shafts, the centre is fitted in a freely-swivelling mount.

Technical Drawing.

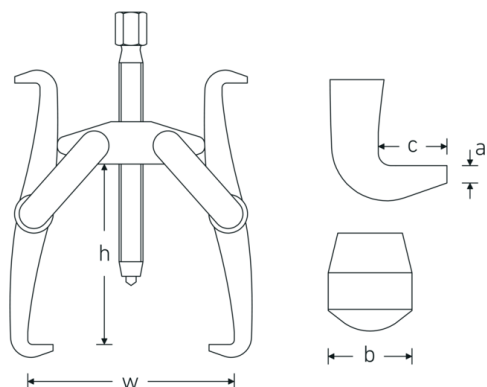

Technical Attributes.

External hex drive (mm)	19 mm
Thickness of hook base tip mm (a)	3 mm
Hook base width mm (b)	24 mm
Hook base depth mm (c)	12 mm
Hook width	20/24 mm

Logistics data.

Depth mm (IFS)	235
Width mm (IFS)	146
Height mm (IFS)	42
Length (packed, mm)	290
Width (packed, mm)	240
Height (packed, mm)	50

Size	1	Volume (packed, dm3)	3.48 dm3
Number of hooks	2	Art. no.	71025101
max. load	5 t	Weight (gross, kg)	1,908
Clamping depth (h) mm	130 mm	Weight PAP (kg)	0,164
Spindle thread size	M18 x 1,5 x 170	Weight PVC (kg)	0,000
Clamping width mm (w)	160 mm	GTIN	4018754342037
		Country of origin	GERMANY
		Region of origin	Nordrhein-Westfalen
		WEEE/ElektroG	nicht ear-pflichtig
		Customs tariff no.	82055980
		Packing standard	1
		Weight	2000 g

Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
71025101	11251/1 Abzieher, 2armig 160x130mm	Puller Clamping w.160mm x Clamping d.130mm	4018754342037
71025102	11251/2 Abzieher, 2armig 220x170mm	Puller Clamping w.220mm x Clamping d.170mm	4018754342044

GTIN-Code.



Spare parts/spare part for.



79281006

Images.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal