



Torque wrench

730 Quick



Art.No. **91381054**
GTIN **4018754320325**
Model **730/2 1 QUICK**



Label.

Torque wrench No. 730 Quick Measuring r. 2-10N·m Tool holders 9 x 12 mm L. 179mm

Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5–65)
- rapid setting thanks to easy-action locking lever in the handle (sizes 5–65)
- ergonomically designed, non-slip adjuster with a thumb recess
- magnifying glass integrated in the display window
- optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
- on request also available as an N·m-only version without twin scale (sizes 5–65)
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly.
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value $\pm 4\%$**

Advantages.

Releasing.

Product highlights.



Wear-resistant.

Wear resistant trigger system with a flexible rod. In contrast to conventional torque wrenches, it is not necessary to reset the wrench to zero after each job to unload the spring. In this way, users benefit from long-term accuracy and safe measurement results with less time required.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Simple.


Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.

Technical Drawing.

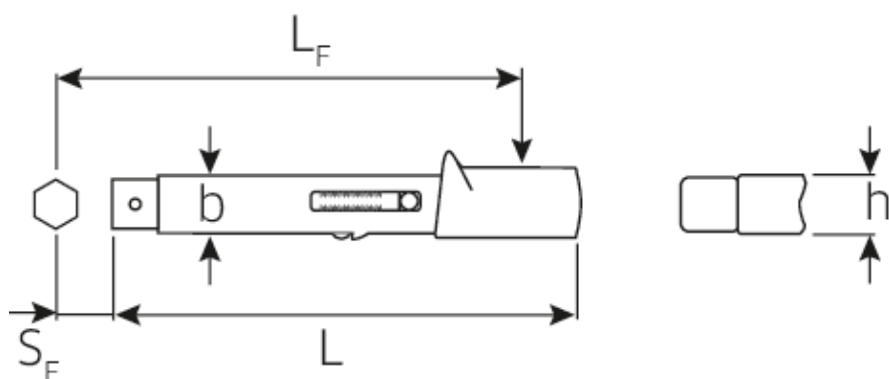

Technical Attributes.

| | |
|--|-----------|
| Width mm (b) | 27,5 mm |
| Size | 2-1 |
| Size square socket [inside square drive] | 9 x 12 mm |
| Height mm (h) | 23,6 mm |

Logistics data.

| | |
|---------------------|-----|
| Depth mm (IFS) | 180 |
| Width mm (IFS) | 40 |
| Height mm (IFS) | 40 |
| Length (packed, mm) | 250 |
| Width (packed, mm) | 55 |

| | | | |
|---------------------|----------|----------------------|---------------------|
| Length mm (L) | 179 mm | Height (packed, mm) | 55 |
| LF | 157,2 mm | Volume (packed, dm3) | 0.75625 dm3 |
| Measuring range N·m | 2-10 N·m | Art. no. | 91381054 |
| SF | 17,5 mm | Weight (gross, kg) | 0,402 |
| Scale division [E1] | 0,5 N·m | Weight PAP (kg) | 0,000 |
| | | Weight PVC (kg) | 0,081 |
| | | GTIN | 4018754320325 |
| | | Country of origin | GERMANY |
| | | Region of origin | Nordrhein-Westfalen |
| | | WEEE/ElektroG | nicht ear-pflichtig |
| | | Customs tariff no. | 82041100 |
| | | Packing standard | 1 |
| | | Weight | 315 g |

Variants.

| Art. no. | Art. no. (ERP) | Description | GTIN |
|----------|----------------|---|---------------|
| 91381054 | 730/2 1 QUICK | Torque wrench No. 730 Quick Measuring r. 2-10N·m Tool holders 9 x 12 mm L. 179mm | 4018754320325 |
| 50184002 | 730/2 QUICK | Service MANOSKOP® torque wrench (N·m) No. 730/2 Quick Measuring r. 4-20N·m Tool holders 9 x 12 mm L. 179mm | 4018754292653 |
| 50184004 | 730/4 QUICK | Service MANOSKOP® torque wrench (N·m) No. 730/4 Quick Measuring r. 8-40N·m Tool holders 9 x 12 mm L. 223mm | 4018754292660 |

GTIN-Code.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal