

## Standard MANOSKOP® torque wrenches w. permanently installed ratchet

### 721/5 Quick



Art.No. 50204005  
GTIN 4018754268917  
Model 721/5 QUICK

**Label.** MANOSKOP® torque wrench No. 721/5 Quick Measuring r. 6-50N·m Drive 3/8 L. 352mm

- Features.**
- click-type
  - the measuring element is only under load while force is being applied, no need for manual reset to zero
  - rapid setting thanks to easy-action locking lever in the handle
  - ergonomically designed, non-slip adjuster with a thumb recess
  - dual stop signal
  - twin scales N·m/ft·lb
  - optimised convex handle for strain-free working
  - any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
  - all the sensitive components are protected by the sturdy tubular steel housing
  - calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
  - certificate in accordance with DIN EN ISO 6789-2:2017
  - **display deviation value  $\pm 4\%$**

## Advantages.

Made in Germany – STAHLWILLE release torque wrench, ratchet with punch square, length 352 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204005.

Lightning-fast and precise torque adjustment.

Patented, low-wear release system with bending rod.

Continued loading after release or loading in the opposite functional direction will not damage the torque wrench.

## Product highlights.



### Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.



### Fast.



Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



### Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

## Technical Drawing.

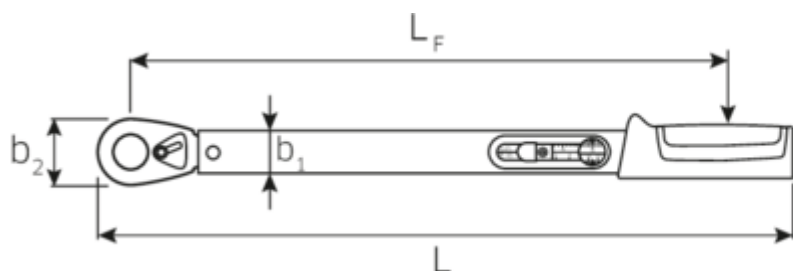

## Technical Attributes.

Measuring range N·m	6-50 N·m
Measuring range ft·lb	5-36 ft·lb
External square drive (inch)	3/8
b1	28 mm
b2	27,5 mm
Size	5
Height mm (h1)	23 mm
Height mm (h2)	14,5 mm
Length mm (L)	352 mm
LF	293 mm
MA N·m	6 N·m
Nominal value N·m	50 N·m
Scale division [E1]	2 N·m

## Logistics data.

Depth mm (IFS)	352
Width mm (IFS)	40
Height mm (IFS)	50
Length (packed, mm)	370
Width (packed, mm)	45
Height (packed, mm)	50
Volume (packed, dm <sup>3</sup> )	0.8325 dm <sup>3</sup>
Art. no.	50204005
Weight (gross, kg)	0,960
Weight PAP (kg)	0,000
Weight PVC (kg)	0,000
GTIN	4018754268917
Country of origin	GERMANY

<b>Scale division [E2]</b>	1 ft·lb	<b>Region of origin</b>	Nordrhein-Westfalen
		<b>WEEE/ElektroG</b>	nicht ear-pflichtig
		<b>Customs tariff no.</b>	82041100
		<b>Packing standard</b>	1
		<b>Weight</b>	880 g

## Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
50204005	721/5 QUICK	MANOSKOP® torque wrench No. 721/5 Quick Measuring r. 6-50N·m Drive 3/8 L. 352mm	4018754268917
50204015	721/15 QUICK	MANOSKOP® torque wrench No. 721/15 Quick Measuring r. 30-150N·m Drive 1/2 L. 452mm	4018754268924
50204020	721/20 QUICK	MANOSKOP® torque wrench No. 721/20 Quick Measuring r. 40-200N·m Drive 1/2 L. 483mm	4018754268931
50204030	721/30 QUICK	MANOSKOP® torque wrench No. 721/30 Quick Measuring r. 60-300N·m Drive 1/2 L. 553mm	4018754268948

## GTIN-Code.



## Spare parts/spare part for.



59191005  
Ratchet spare parts  
sets for torque  
wrenches No.721

## Images.



**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200  
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal  
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal