

## Torque wrench

### 730A/4 Quick



Art.No. 50584004  
GTIN 4018754292691  
Model 730A/4 QUICK

#### Label.

Torque wrench service MANOSKOP® (in·lb) No. 730A/4 Quick Measuring r. 70-350in  
lb Tool holders 9 x 12 mm L. 223mm

#### Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5–65)
- rapid setting thanks to easy-action locking lever in the handle (sizes 5–65)
- ergonomically designed, non-slip adjuster with a thumb recess
- magnifying glass integrated in the display window
- optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
- on request also available as an N·m-only version without twin scale (sizes 5–65)
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly.
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value  $\pm 4\%$**

#### Advantages.

Releasing.

## Product highlights.



### Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



### Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



### Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.

## Technologies and features.



### QuickRelease


The QuickRelease technology ensures tools cannot be inadvertently lost – while enabling rapid, safe tool changes.



### Tool Control System

Safety-conscious inlays – designed to fit our Tool Trolleys and Tool Boxes. With yellow signal cut-outs to show whether all the tools are in their places.

## Technical Drawing.

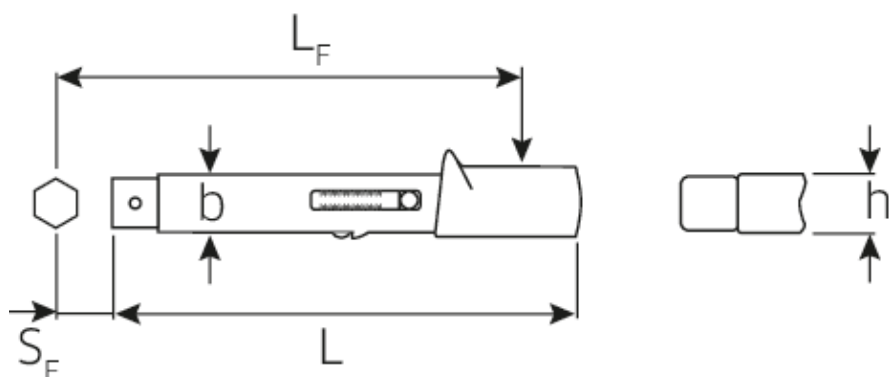

## Technical Attributes.

Measuring range in·lb	70-350 in·lb
Width mm (b)	27,5 mm
Size	a/4
Size square socket [inside square drive]	9 x 12 mm
Height mm (h)	23,6 mm
Length mm (L)	223 mm
LF	200,8 mm
SF	17,5 mm
Scale division [E1]	10 in·lb

## Logistics data.

Depth mm (IFS)	225
Width mm (IFS)	43
Height mm (IFS)	30
Length (packed, mm)	255
Width (packed, mm)	55
Height (packed, mm)	55
Volume (packed, dm <sup>3</sup> )	0.771375 dm <sup>3</sup>
Art. no.	50584004
Weight (gross, kg)	0,478
Weight PAP (kg)	0,000
Weight PVC (kg)	0,066
GTIN	4018754292691
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Packing standard	1
Weight	395 g

## Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
50584004	730A/4 QUICK	Torque wrench service MANOSKOP® (in·lb) No. 730A/4 Quick Measuring r. 70-350in lb Tool holders 9 x 12 mm L. 223mm	4018754292691

50584002	730A/2 QUICK	Torque wrench service MANOSKOP® (in·lb) No. 730a/2 Quick Measuring r. 30-175in lb Tool holders 9 x 12 mm L. 179mm	4018754292684
50584001	730A/2-1 QUICK	Torque wrench No. 730 Quick Measuring r. 17,5-87,5in lb Tool holders 9 x 12 mm L. 179mm	4018754292677

## GTIN-Code.



4 018754 292691

**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200  
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal  
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal