

## Basic wrench w.tool carrier for insert tools

### 730/10 Quick



Art.No. **50184010**  
 GTIN **4018754266203**  
 Model **730/10 QUICK**



#### Label.

Torque wrench service MANOSKOP® No. 730/10 Quick Measuring r. 20-100N·m Tool holders 9 x 12 mm L. 370mm

#### Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5–65)
- rapid setting thanks to easy-action locking lever in the handle (sizes 5–65)
- ergonomically designed, non-slip adjuster with a thumb recess
- optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
- on request also available as an N·m-only version without twin scale (sizes 5–65)
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw – does not act on the trigger mechanism and cannot cause damage to it
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value ± 4%**

## Advantages.

Fast setting with easy-to-operate clamping lever in the handle, integrated lens for better readability of the set value

Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free work

Efficient. No reset to "0" necessary, as measuring element is only strained during the tightening process

Releasing torque wrench with receptacle for exchangeable plug-in tools, double stop signal (tactile and audible), left-hand tightening by turning over the plug-in tools

With calibration certificate, display deviation  $\pm 4\%$

## Product highlights.



### Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



### Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



### Protected.

The internal mechanism is extremely resistant to mechanical wear and well protected against dirt and soiling inside the outer housing.



### Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.


## Technologies and features.



### QuickRelease

The QuickRelease technology ensures tools cannot be inadvertently lost – while enabling rapid, safe tool changes.

## Technical Drawing.

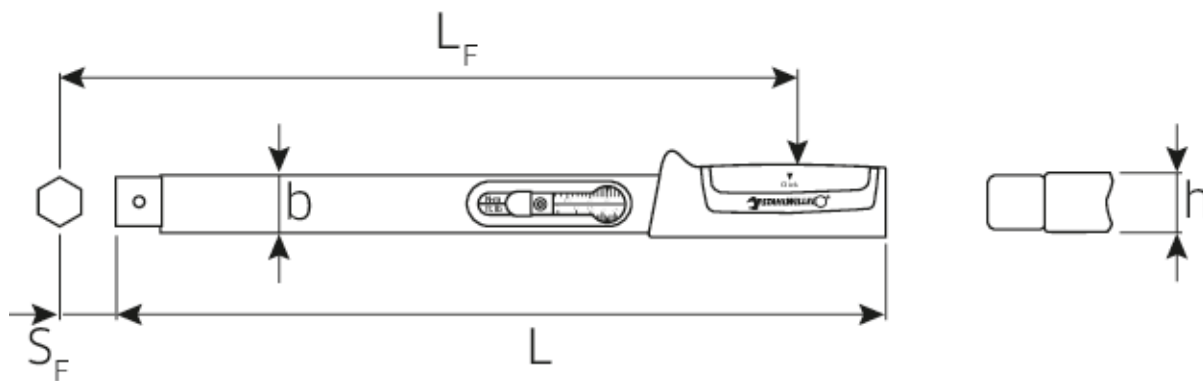

## Technical Attributes.

Measuring range N·m	20-100 N·m
Measuring range ft·lb	15-72,5 ft·lb
Width mm (b)	28 mm
Size	10
Size square socket [inside square drive]	9 x 12 mm
Height mm (h)	23 mm
Length mm (L)	370 mm
LF	343 mm
SF	17,5 mm
Scale division [E1]	2,5 N·m
Scale division [E2]	2,5 ft·lb

## Logistics data.

Depth mm (IFS)	371
Width mm (IFS)	42
Height mm (IFS)	35
Length (packed, mm)	398
Width (packed, mm)	55
Height (packed, mm)	52
Volume (packed, dm <sup>3</sup> )	1.13828 dm <sup>3</sup>
Art. no.	50184010
Weight (gross, kg)	1,055
Weight PAP (kg)	0,000
Weight PVC (kg)	0,110
GTIN	4018754266203
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Packing standard	1
Weight	936 g

## Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
50184005	730/5 QUICK	Torque wrench service MANOSKOP® No. 730/5 Quick Measuring r. 6-50N·m Tool holders 9 x 12 mm L. 315mm	4018754268856

50184010	730/10 QUICK	Torque wrench service MANOSKOP® No. 730/10 Quick Measuring r. 20-100N·m Tool holders 9 x 12 mm L. 370mm	4018754266203
50184012	730/12 QUICK	Torque wrench service MANOSKOP® No. 730/12 Quick Measuring r. 25-130N·m Tool holders 14 x 18 mm L. 410mm	4018754268863
50184020	730/20 QUICK	Torque wrench service MANOSKOP® No. 730/20 Quick Measuring r. 40-200N·m Tool holders 14 x 18 mm L. 455mm	4018754268870
50184030	730/30 QUICK	Torque wrench service MANOSKOP® No. 730/30 Quick Measuring r. 60-300N·m Tool holders 14 x 18 mm L. 520mm	4018754324071
50184040	730/40 QUICK	Torque wrench service MANOSKOP® No. 730/40 Quick Measuring r. 80-400N·m Tool holders 14 x 18 mm L. 590mm	4018754268887
50184065	730/65 QUICK	Torque wrench service MANOSKOP® No. 730/65 Quick Measuring r. 130-650N·m Tool holders 14 x 18 mm L. 875mm	4018754268894
50184565	730II/65 QUICK	Torque wrench service MANOSKOP® No. 730II/65 Quick Measuring r. 130-650N·m Tool holders 22 x 28 mm L. 897mm	4018754268900

## GTIN-Code.



## Accessories.



58240010  
Square drive insert tool

## Images.



**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200  
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal  
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal